


Technical datasheet for:

KKHR 32, 40 and 50

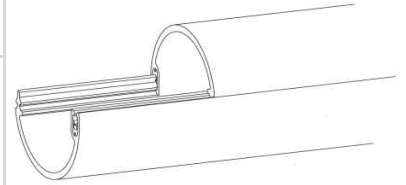

General data

| | | |
|--------------------------|--|-------------------------------------|
| Item | Split duct | |
| Description | Consists of 2 half shells, for pressure tight repair damages in PE duct or close blow in area in combination with EBM. | |
| Optional | To install the split ducts, it is necessary to use the according assembly tool. | |
| Package unit | KKHR Ø 32mm x 2000mm: | 2 pieces / unit; 84 pieces / pallet |
| | KKHR Ø 40mm x 2000mm: | 2 pieces / unit; 68 pieces / pallet |
| | KKHR Ø 50mm x 2000mm: | 3 pieces / unit; 51 pieces / pallet |
| Production length | 2000mm | |

Technical data

| Quality | Value | Unit |
|------------------|---|-----------|
| Material | PolyVinylChlorid - Unplastinized PVC-U | |
| Dimension | $d = 32.0^{+0.2}$; $s = 1.8^{+0.4}$ | mm |
| | $d = 40.0^{+0.2}$; $s = 1.9^{+0.4}$ | |
| | $d = 50.0^{+0.2}$; $s = 2.4^{+0.5}$ | |
| Pressure | 0.5 (permanent gas- and watertight) | bar |
| | 10 / 30 | bar / min |
| | mastic (enclosed at the sleeves) is to use according installation instruction | |

gabocom is certified by the quality system following DIN EN ISO 9001, the environmental management system DIN EN ISO 14001 and the energy management system DIN EN 50001.

The used materials meet the REACH default (EU regulation 1907/2006) and the RoHS default (EU guidelines 2011/65).

gabo Systemtechnik GmbH
 Am Schaidweg 7
 94559 Niederwinkling
 GERMANY

Tel. +49 9962 950-200
 Fax +49 9962 950-202
 info@gabocom.com
 www.gabocom.com

Editor: LF
 Release: MK
 Date: 07.12.2015
 Edition: 2

No responsibility is taken for the currency and completeness of details and information. This document can be revised and supplemented without prior notice. Liability for damages is excluded.