


Technical datasheet for:

KKHR 32, 40 and 50

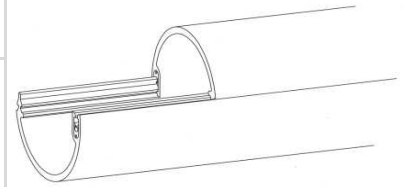

General data

Item	Split duct	
Description	Consists of 2 half shells, for pressure tight repair damages in PE duct or close blow in area in combination with EBM.	
Optional	To install the split ducts, it is necessary to use the according assembly tool.	
Package unit	KKHR Ø 32mm x 2000mm:	2 pieces / unit; 84 pieces / pallet
	KKHR Ø 40mm x 2000mm:	2 pieces / unit; 68 pieces / pallet
	KKHR Ø 50mm x 2000mm:	3 pieces / unit; 51 pieces / pallet
Production length	2000mm	

Technical data

Quality	Value	Unit
Material	PolyVinylChlorid - Unplastinized PVC-U	
Dimension	$d = 32.0^{+0.2}$; $s = 1.8^{+0.4}$	mm
	$d = 40.0^{+0.2}$; $s = 1.9^{+0.4}$	
	$d = 50.0^{+0.2}$; $s = 2.4^{+0.5}$	
Pressure	0.5 (permanent gas- and watertight)	bar
	10 / 30	bar / min
	mastic (enclosed at the sleeves) is to use according installation instruction	

gabocom is certified by the quality system following DIN EN ISO 9001, the environmental management system DIN EN ISO 14001 and the energy management system DIN EN 50001.

The used materials meet the REACH default (EU regulation 1907/2006) and the RoHS default (EU guidelines 2011/65).

gabo Systemtechnik GmbH
Am Schaidweg 7
94559 Niederwinkling
GERMANY

Tel. +49 9962 950-200
Fax +49 9962 950-202
info@gabocom.com
www.gabocom.com

Editor: LF
Release: MK
Date: 07.12.2015
Edition: 2

No responsibility is taken for the currency and completeness of details and information. This document can be revised and supplemented without prior notice. Liability for damages is excluded.