


Technical datasheet for:

## KKHR 110 and 125

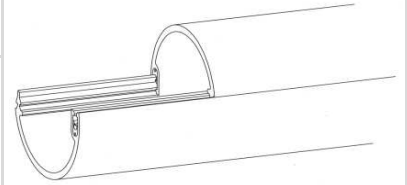


### General data

<b>Item</b>	Split duct	
<b>Description</b>	Consists of 2 half shells, for pressure tight repair damages in cable ducts in combination with KKHRM.	
<b>Optional</b>	To install the split ducts, it is necessary to use the according assembly tool.	
<b>Package unit</b>	KKHR Ø 110mm x 2000mm:	3 pieces / unit; 78 pieces / pallet
	KKHR Ø 110mm x 6000mm:	3 pieces / unit; 78 pieces / pallet
	KKHR Ø 125mm x 3000mm:	4 pieces / unit; 52 pieces / pallet
	KKHR Ø 125mm x 6000mm:	4 pieces / unit; 52 pieces / pallet
<b>Production length</b>	KKHR 110:	2000 / 6000 mm
	KKHR 125:	3000 / 6000 mm

### Technical data

Quality	Value	Unit
<b>Material</b>	PolyVinylChlorid - Unplastinized PVC-U	
<b>Dimension</b>	$d = 110.0^{+0.3}$ ; $s = 3.2^{+0.5}$ ; $a = \text{approx. } 90$	mm
	$d = 125.0^{+0.3}$ ; $s = 3.7^{+0.6}$ ; $a = \text{approx. } 104$	
<b>Pressure</b>	0.5 (permanent gas- and watertight)	bar
	mastic (enclosed at the sleeves) is to use according installation instruction	

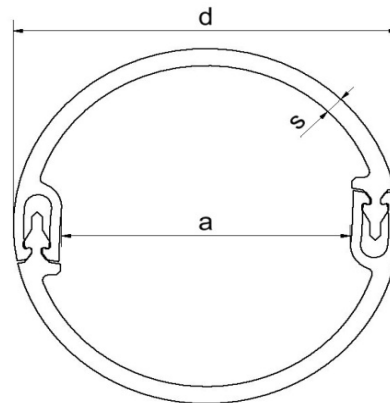

**gabocom is certified by the quality system following DIN EN ISO 9001, the environmental management system DIN EN ISO 14001 and the energy management system DIN EN ISO 50001. The used materials meet the REACH default (EU regulation 1907/2006) and the RoHS default (EU guidelines 2011/65).**

gabo Systemtechnik GmbH  
Am Schaidweg 7  
94559 Niederwinkling  
GERMANY

Tel. +49 9962 950-200  
Fax +49 9962 950-202  
info@gabocom.com  
www.gabocom.com

Editor: AF  
Release: MK  
Date: 26.03.2019  
Edition: 4

No responsibility is taken for the currency and completeness of details and information. This document can be revised and supplemented without prior notice. Liability for damages is excluded.