


Technical datasheet for:

KKHR 110 and 125

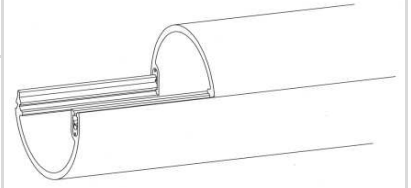


General data

Item	Split duct	
Description	Consists of 2 half shells, for pressure tight repair damages in cable ducts in combination with KKHRM.	
Optional	To install the split ducts, it is necessary to use the according assembly tool.	
Package unit	KKHR Ø 110mm x 2000mm:	3 pieces / unit; 78 pieces / pallet
	KKHR Ø 110mm x 6000mm:	3 pieces / unit; 78 pieces / pallet
	KKHR Ø 125mm x 3000mm:	4 pieces / unit; 52 pieces / pallet
	KKHR Ø 125mm x 6000mm:	4 pieces / unit; 52 pieces / pallet
Production length	KKHR 110:	2000 / 6000 mm
	KKHR 125:	3000 / 6000 mm

Technical data

Quality	Value	Unit
Material	PolyVinylChlorid - Unplastinized PVC-U	
Dimension	$d = 110.0^{+0.3}$; $s = 3.2^{+0.5}$; $a = \text{approx. } 90$	mm
	$d = 125.0^{+0.3}$; $s = 3.7^{+0.6}$; $a = \text{approx. } 104$	
Pressure	0.5 (permanent gas- and watertight)	bar
	mastic (enclosed at the sleeves) is to use according installation instruction	

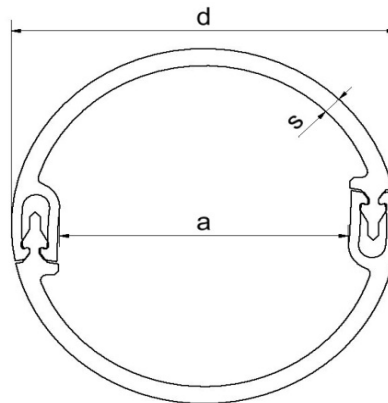

gabocom is certified by the quality system following DIN EN ISO 9001, the environmental management system DIN EN ISO 14001 and the energy management system DIN EN ISO 50001. The used materials meet the REACH default (EU regulation 1907/2006) and the RoHS default (EU guidelines 2011/65).

gabo Systemtechnik GmbH
Am Schaidweg 7
94559 Niederwinkling
GERMANY

Tel. +49 9962 950-200
Fax +49 9962 950-202
info@gabocom.com
www.gabocom.com

Editor: AF
Release: MK
Date: 26.03.2019
Edition: 4

No responsibility is taken for the currency and completeness of details and information. This document can be revised and supplemented without prior notice. Liability for damages is excluded.